


# Instructions

## For the connection of a CME306 or a CME456 to a 30" wide Lancer Ice and Beverage Dispenser


Kit Contents: One mounting bracket, two filler plates, two ¼ - 20 bolts, six sheet metal screws, one tube of sealant, one thermostat, one thermostat bracket w/grommets, 2 three prong bolts, one wire harness, two machine screws. Six .140" dia. holes will need to be drilled for sheet metal screws.

1. Place the Lancer dispenser in its final location.
2. Remove the cover from the dispenser.
3. Remove the front light housing from the Lancer - lift up, unplug its wire and separate from the dispenser.
4. Place the CME306 or the CME456 onto the dispenser. Center the ice machine left to right. The ice machine will overhang the back of the dispenser about ¾ of an inch.
5. Attach the mounting bracket from the kit to the dispenser, secure with the two ¼ - 20 bolts from the kit.

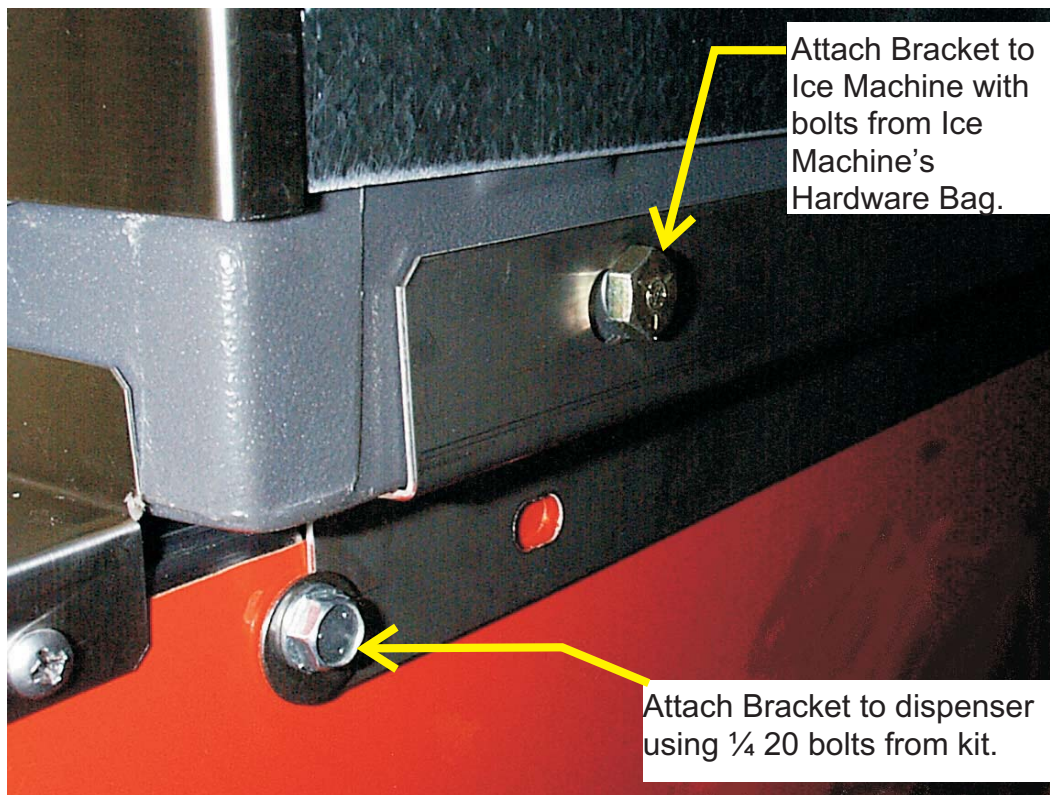

6. Attach the bracket mounted in the prior step to the ice machine, secure with 2 of the bolts from the ice machine's hardware bag.

7. Attach the bin thermostat to the back of the control box with the two machine screws from the kit.

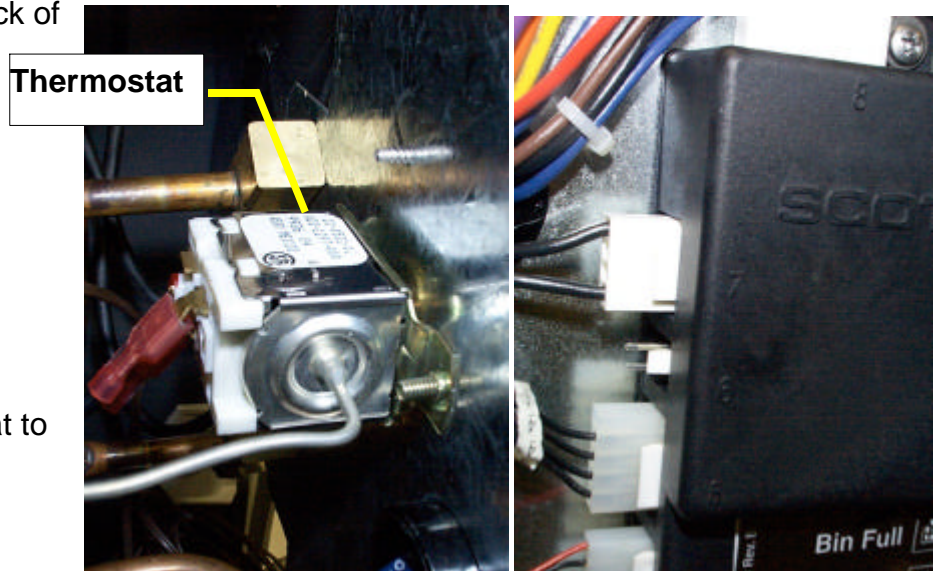


8. Connect wire harness to bin thermostat.

9. Route wire harness from thermostat to controller, connect to terminal 7.

10. Route thermostat bulb through hole in base.



11. Mount bulb in thermostat bracket.

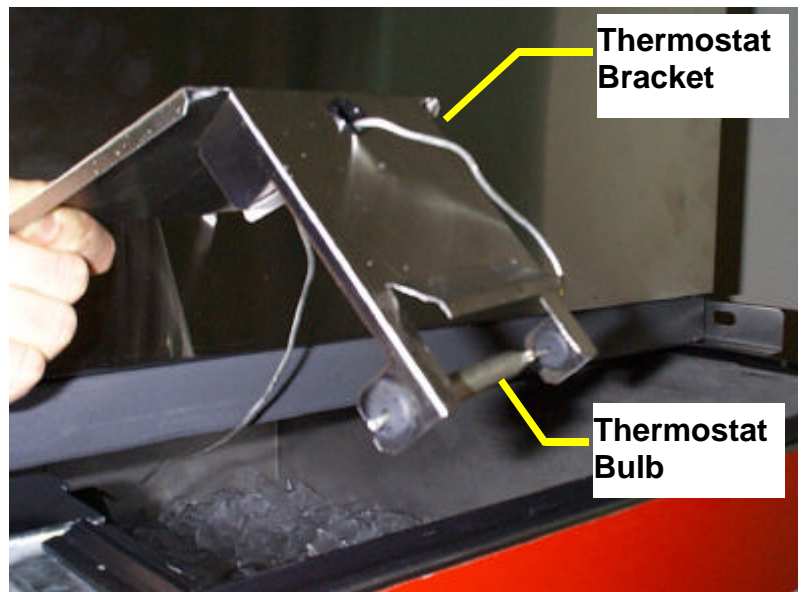


12. Fasten bin thermostat bracket to the bottom of the ice machine with the three-pronged bolts from the kit.




13. Place the left filler plate onto the left top edge of the dispenser. Use the plate as a template and drill .140" dia.(#28 or 9/64") holes, 1/4" deep into the front (1 hole) and back (2 holes) of the dispenser.

14. Repeat step 13 for the right side filler plate.

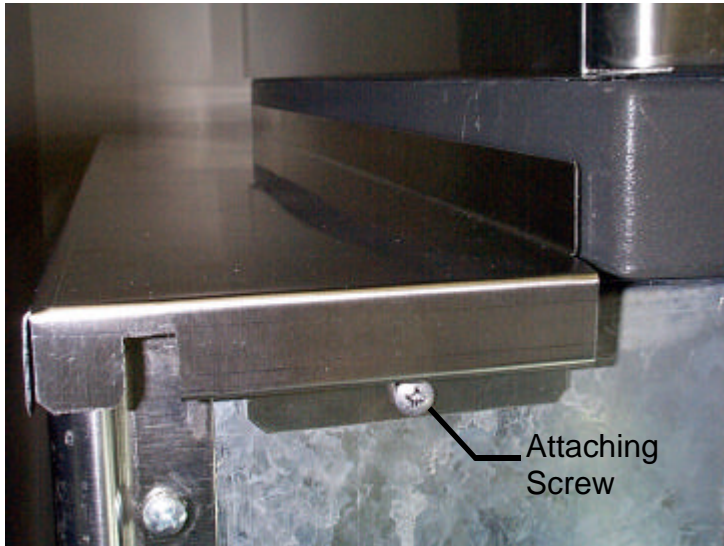

**Left Side Filler Plate**

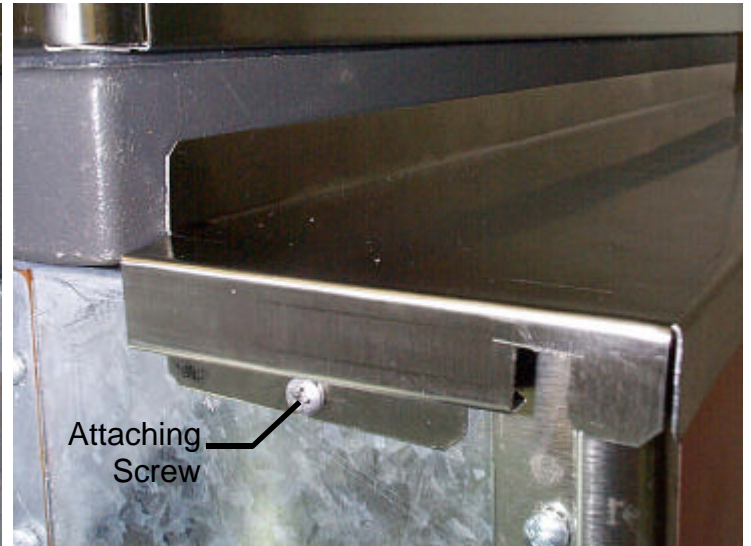

**Right Side Filler Plate**

15. Place a bead of food grade sealant (from the kit) onto the vertical surface of the filler plate where it contacts the base of the ice machine. Repeat for the other filler plate.

16. Place both filler plates onto the dispenser. Secure with one sheet metal screw at the front and two at the back for each plate.

17. Place the light housing back onto the dispenser and reconnect the electrical wire.

18. Finish the balance of the installation per the instructions with the ice machine and the dispenser.

Note: Keep the drain lines separate.